


ADVANCED LOGITECH MOUSE SUPPORT HOT-PLUGGING AND ADVANCED MOUSE & KEYBOARD SUPPORT AUDIO&MIC SWITCHING

2-port PS/2 KVM Switch w/ Audio&Mic

UKA-212LM PS/2 KVM Switch w/ Audio&Mic and Advanced Logitech Mouse Support

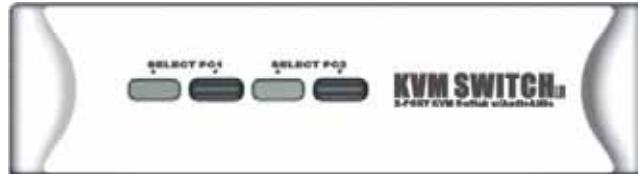

The UKA-212LM is a 2-port PS/2 KVM Switch with Audio and Microphone switching function. It allows you to control 2 multimedia computers using only one PS/2 keyboard, mouse, monitor and a set of speakers and microphone. It also features a **hot-plugging** capability that allows you to plug off and on the KVM cabling without powering down any of your computers. It is specially supported with advanced Logitech Mouse support to offer you seamless operation with high-end Logitech wired/wireless/optical mice.

Audio and Microphone Switching offers you uninterrupted multimedia experience with KVM Switching

The audio and microphone switching function allows you to leverage the multimedia systems on each of your multiple computers. You can monitor the audio/mic input/output of each of your computers without plugging on and off the audio/mic cables. And it takes only one set of speaker and microphone instead of one set for each computer.

Features

- 2-port PS/2 KVM switch with audio and microphone switching
- PS/2 style keyboard and mouse control
- Simultaneous/independent switching of Audio-Microphone and PC channel
- Advanced Logitech Mouse support for high-end Logitech wired/wireless/optical mice
- Direct channel selection and operation using front-panel push buttons and keyboard hotkeys
- Support for DOS, Windows 95/98/SE/ME/2000/XP, Linux, etc.
- Hot-plugging PCs for maintenance without powering down the KVM Switch or PCs
- Mouse reset hotkey for non-PnP OS such as Win NT 4.0 and Linux
- LED indicators for easy port status monitoring
- Plug-and-play, no Windows driver software needed for PS/2 keyboard and PS/2 operation
- Buzzer sound for port switching confirmation
- Autoscan mode for quick browsing of all connected computers
- Autoscan delay time programmable 5 ~ 100 seconds through hotkey commands
- High VGA resolution 2048 x 1536
- Desktop size with metal enclosure and plastic front-panel



Specifications

Model No.	UKA-212LM
PC Connections	2
Console Connections	1
PC Port Connectors	2 x PS/2 Keyboard 6-pin Mini Din female (+ audio) 2 x PS/2 Mouse 6-pin Mini Din female (+ mic) 2 x VGA HDB 15 pin female
Console Port Connectors	1 x PS/2 Keyboard 6-pin Mini Din female 1 x PS/2 Mouse 6 pin Mini Din female 1 x VGA HDB 15 pin female 1 x 3.5mm audio in/out jack 1 x 3.5mm mic in/out jack
On Screen Display	No
PC selection	Hotkey / Push buttons
PC port LED	2
Scan delay time	5 ~ 100 sec. programmable through hotkey (default =5 sec.)
Keyboard/Mouse emulation	PS/2
VGA Resolution	2048 x 1536
Power Type	PS/2 interface power
Power Adapter	(Optional) DC 9V 500mA
Operation Temperature	0 ~ 40°C
Size	Desktop
Housing	Metal case + Plastic front-panel
Dimension (L x W x H)	165 × 103.5 × 45 mm
Weight	? g
Safety / Emission	FCC, CE